



Features at a glance

- Commercial grade aluminium frame structure
- Stainless steel hardware for longevity
- Durable high performance hub and fittings
- Telescopic mast enables umbrella to clear most furniture when closing
- Robust 82.5mm / IMM mast with 3.4mm wall thickness


Canopy

- Premium Sunbrella Acrylic - 100% Solution Dyed
- Waterproof Rating: >300mm water column
- Maintenance: All fabrics can be washed and replaced
- Weight: 315 g/m²
- Colourfastness: 7-8/8
- Shade Rating: UPF 50+

Colour Options*




Black



Oyster White



Logo Red



Charcoal Tweed



Ocean Blue



Sunflower Yellow

*other custom colours available on request.

Accessories



Rain Gutter

Adjoining square umbrellas can be connected with removable rain gutters to increase weatherproof area.

BEST-IN-CLASS WARRANTY

Relax easy knowing your outdoor umbrella purchase is protected by the industries best warranty and customer support.



Fabric
Warranty




Frame
Warranty

SU10

COMMERCIAL CENTRE POLE UMBRELLA

Size & Configuration

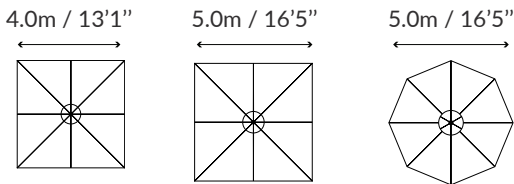

Mounting Options

Surface Plate

For deck, patio and concrete mounting.




In-Ground Anchor

For mounting with a concrete footing.



Free-Standing Base*

For complete customised maneuverability.

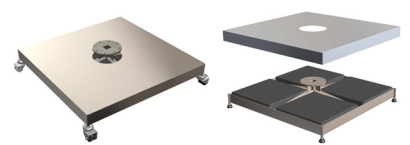

Pavers are required for ballast and are not supplied. Optional castor wheels shown.

Umbrella Dimensions

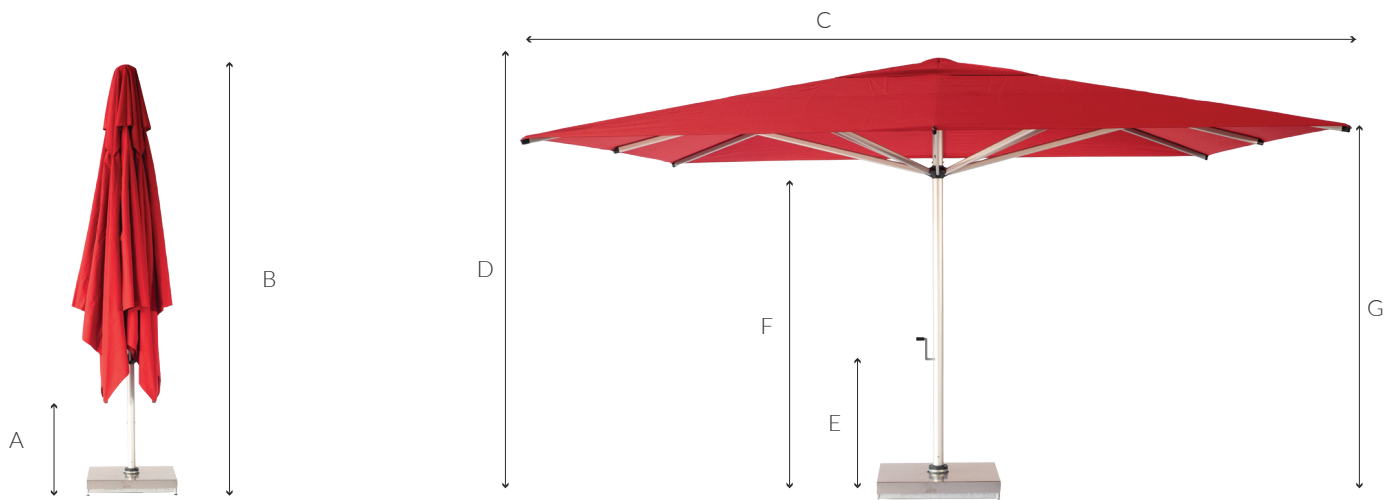


Diagram Legend

- A** Closed Canopy Clearance*
- B** Overall Height when closed*
- C** Canopy Width
- D** Overall Height*
- E** Winder Handle Height*
- F** Hub Height*
- G** Arms Height*

4.0m / 13'1" Square

- 900mm / 2'11"
- 3740mm / 12'3"
- 4000mm / 13'1"
- 2870mm / 9'5"
- 840mm / 2'9"
- 2110mm / 6'11"
- 2270mm / 7'5"

5.0m / 16'5" Square

- 730mm / 2'5"
- 4280mm / 14'1"
- 5000mm / 16'5"
- 3120mm / 10'3"
- 920mm / 3'0"
- 2260mm / 7'5"
- 2470mm / 8'1"

5.0m / 16'5" Octagon

- 1040mm / 3'5"
- 3530mm / 11'7"
- 4600mm / 15'1"
- 2810mm / 9'3"
- 840mm / 2'9"
- 2150mm / 7'1"
- 2270mm / 7'5"

*Portable Base installations will add 120mm/4.7" to these measurements. Adding portable base wheels also will add a further 45-80mm/2-3".